




Bvm 952

BVM 952, automatic 500 cup vending machine for hot and cold drinks with up to 48 programmable selections. Reinforced cabinet and door lock with programmable code. Equipped with: mixers and boiler assembly that are extractable to make maintenance operation easier. Cup dispenser adaptable to various diameters and spoon dispenser adjustable from 90 to 105 mm. Switching power supply that guarantees total stability of the instant product dose and complete electric safety protections. Standard multi-protocol electronics.


Bvm 952 technical features




BVM 952

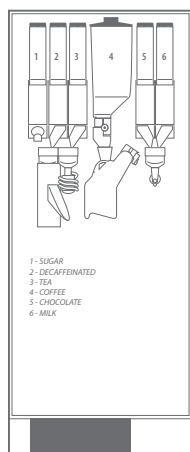


ESPRESSO 5 CANISTERS

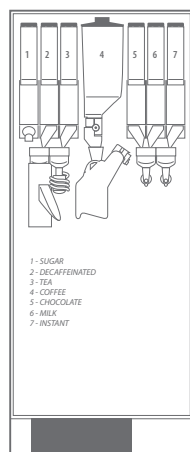


ESPRESSO 6 CANISTERS

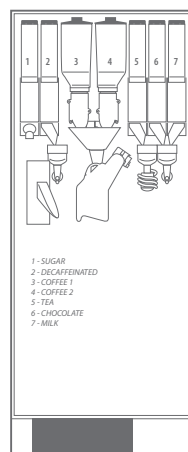

ESPRESSO DOUBLE COFFEE BEAN
CANISTER, 5 CANISTERS

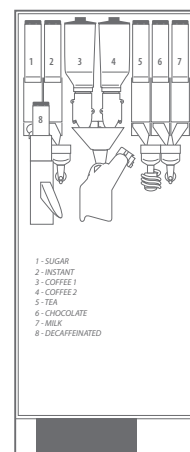

ESPRESSO DOUBLE COFFEE BEAN
CANISTER, 6 CANISTERS

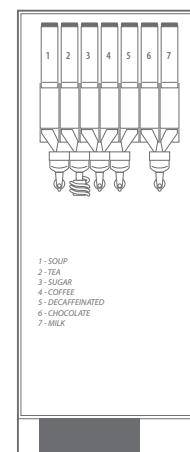

INSTANT 7 CANISTERS

VERSIONS BVM 952	E4S SINGLE BOILER DOUBLE COFFEE BEAN CANISTER ESPRESSO	E5S SINGLE BOILER ESPRESSO *	E5S SINGLE BOILER DOUBLE COFFEE BEAN CANISTER ESPRESSO*	E5S DOUBLE BOILER ESPRESSO	I7S INSTANT °
COFFEE BEANS	2	1	2	1	-
SUGAR CANISTER	1	1	1	1	-
INSTANT CANISTERS	4	5	5	5	7
DIMENSIONS	H 1630 mm x W 666 mm x D 776 mm WEIGHT 50 Kg				
* Anti-vandal coin introduction model is also available					
° Cooling unit model is also available					

TECHNOLOGY



CHARACTERISTICS

ELECTRICAL SUPPLY

230 Vac – 50Hz / 120 Vac – 60 Hz

INTERNAL ELECTRICAL SUPPLY

All the electrical components are supplied at 24 Vdc, with the exception of the boiler resistances, the pump and the steam ventilator that are at 230 Vac – 50 Hz or 120 Vac – 60 Hz

POWER SUPPLY

1.80 kW single boiler espresso version
2.35 kW double boiler espresso version
2.20 kW instant version

WATER SUPPLY

Fitting connection = 3/8"
Water pressure = 0.5 – 6.5 bar

USER INTERFACE

26 push buttons that can be configured both as selections or pre-selections. End selection acoustic signal to render the use of the vending machine simple and immediate. Customizable sugar dosage. Ergonomic commands that can be used by minors and disabled people. 32 digit alphanumeric LCD display.

ACCESSORIES

System for the automatic regulation of the coffee bean grinding that guarantees with the variations of the humidity and the temperature, the best quality of the product dispensed at all times. Cup sensor. Water softener that guarantees the respect of the HACCP standards and prevents lime scale build up. RS232 module. Visual Smart Programmer Speed that allows the upload of the firmware and settings and the download of the settings and audit data without a PC. Cooling unit for cold instant beverages. Telemetry kit (GPRS modem with antenna + clock chip). Additional canister and mixer to reach 6 canisters configuration in the espresso version and 8 canisters in the instant version.

PRODUCT CAPACITY

Coffee beans	3.8 kg
Double coffee bean canister	2.5 kg each (x2)
Instant coffee	1.2 kg
Barley	1.25 kg
Powder milk	1.7 kg
Whitener	3.2 kg
Chocolate	3.6 kg
Lemon tea	3.3 kg
Tea	1.7 kg
Soup	3.6 kg
Sugar	4.0 kg
Spoons	400 pcs
Cups	500 pcs

* In the double coffee bean canister versions additional decaffeinated canister with 0.34 kg capacity

Bianchi Vending in Italy • headquarters • info@bianchivending.com

Corso Africa 9, 24040 Zingonia di Verdellino, Bergamo, Italia

tel. +39.035.45.02.111, fax +39.035.883.304

bianchi
vending.com